




## MTH

**Soil stabilizer-Stone crusher-Asphalt grinder\***  
for tractors between 300 and 400 HP with a  
working depth of 50 cm

**Standard equipment:** PTO driveshaft, dual transmission with cast gear boxes, forged tool holders made of heat treated steel, „double steel cage system” machine shell (WELDOX® steel) provide an effective protection against dust, adjustable HARDOX® counter blade, bolted forged rotor axels, adjustable grid on rear hood, variable shredding chamber, front hydraulic protection hood, rear hydraulic protection/grader hood, hydraulic top link, inner bolted HARDOX® protections.

**Options:** water spray system. Possibility to have the rotor equipped with tooth type “G/3”.

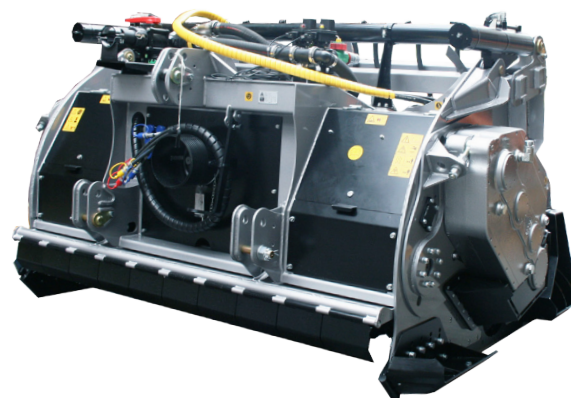

## MTH

Model	Tractor HP		PTO rpm	Working width mm	Overall width mm	Weight Kg	Working depth mm (max)	Teeth q.ty/type	Teeth q.ty/type
	Min	Max						R+R/HD+STC/3/FP +STC/FP	G/3+STC/3/FP+STC/FP
MTH 200	300	400	1000	2080	2600	6900	315-500	138+24+6+6	104+4+4
MTH 225	300	400	1000	2320	2840	7200	315-500	160+24+6+6	116+4+4

Data refers to the machine without options.

\*in specific condition



Tooth type R/65



Tooth type R/HD 65 (option)



Tooth type R/44 with adaptor G/3 (option)




Tooth type G/3 (option)



Tooth type G/3/R44 + adaptor G/3 (option)



Tooth type STC/3/FP (side scraper)



Tooth type STC/FP (side scraper)

The technical data are indicative, not binding and are subject to modification without prior notice.